





REV	DESCRIPTION	DATE

SPECIFICATIONS


Current Rating: 1 Amps
 Insulator resistance: 1000 Megohms Min.
 Dielectric withstanding: AC 500 V
 Contact Resistance: 20 mΩ Max
 Operating Temperature: -40° C - +105° C

MATERIALS

Contact Material: Brass
 Insulator Material: NYLON 6T
 Finish: Gold Plated over nikle

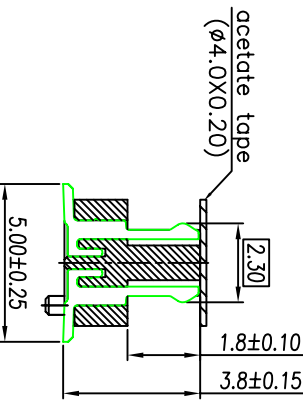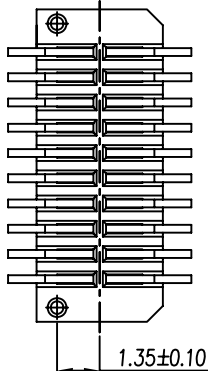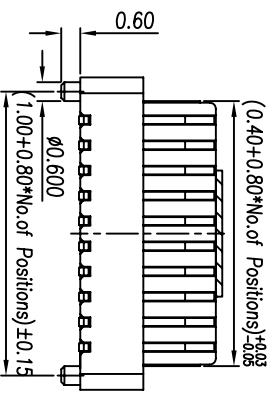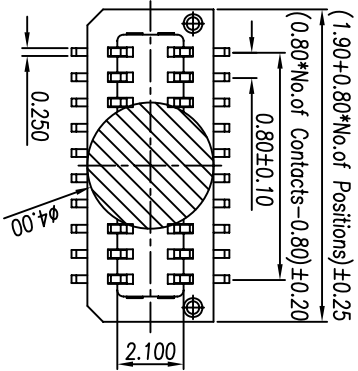

F/M ASSEM HEIGHT: 5.0MM

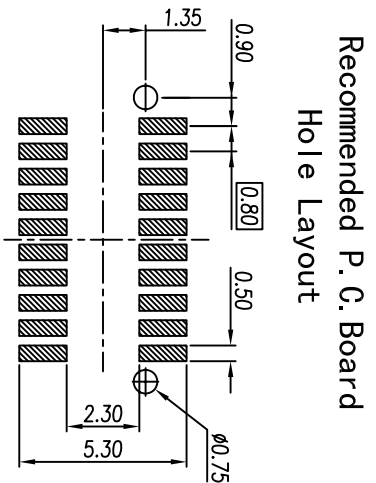

CNT 肯耐特电子有限公司

REV.	UNIT	SCALE
1.0	mm	1:1

GENERAL	
X. TOLERANCE	±
X. ±5°	.X ±0.38
XX. ±5°	.XX ±0.38
XXX. ±5°	.XXX ±0.38

DRAWN		DATE	
CHECK	DATE	Z0150513	
APPROVE	DATE		

DWG. NO.	PART. NO.
	CNT-M080-2*XX-GM-380/5.0(H:5.0)

TITLE
 0.8mm Male header
 SMT Type